




Quality Matting Solutions

## Mats

### Cero Plus Rolls

Designed and built to scrape and protect!

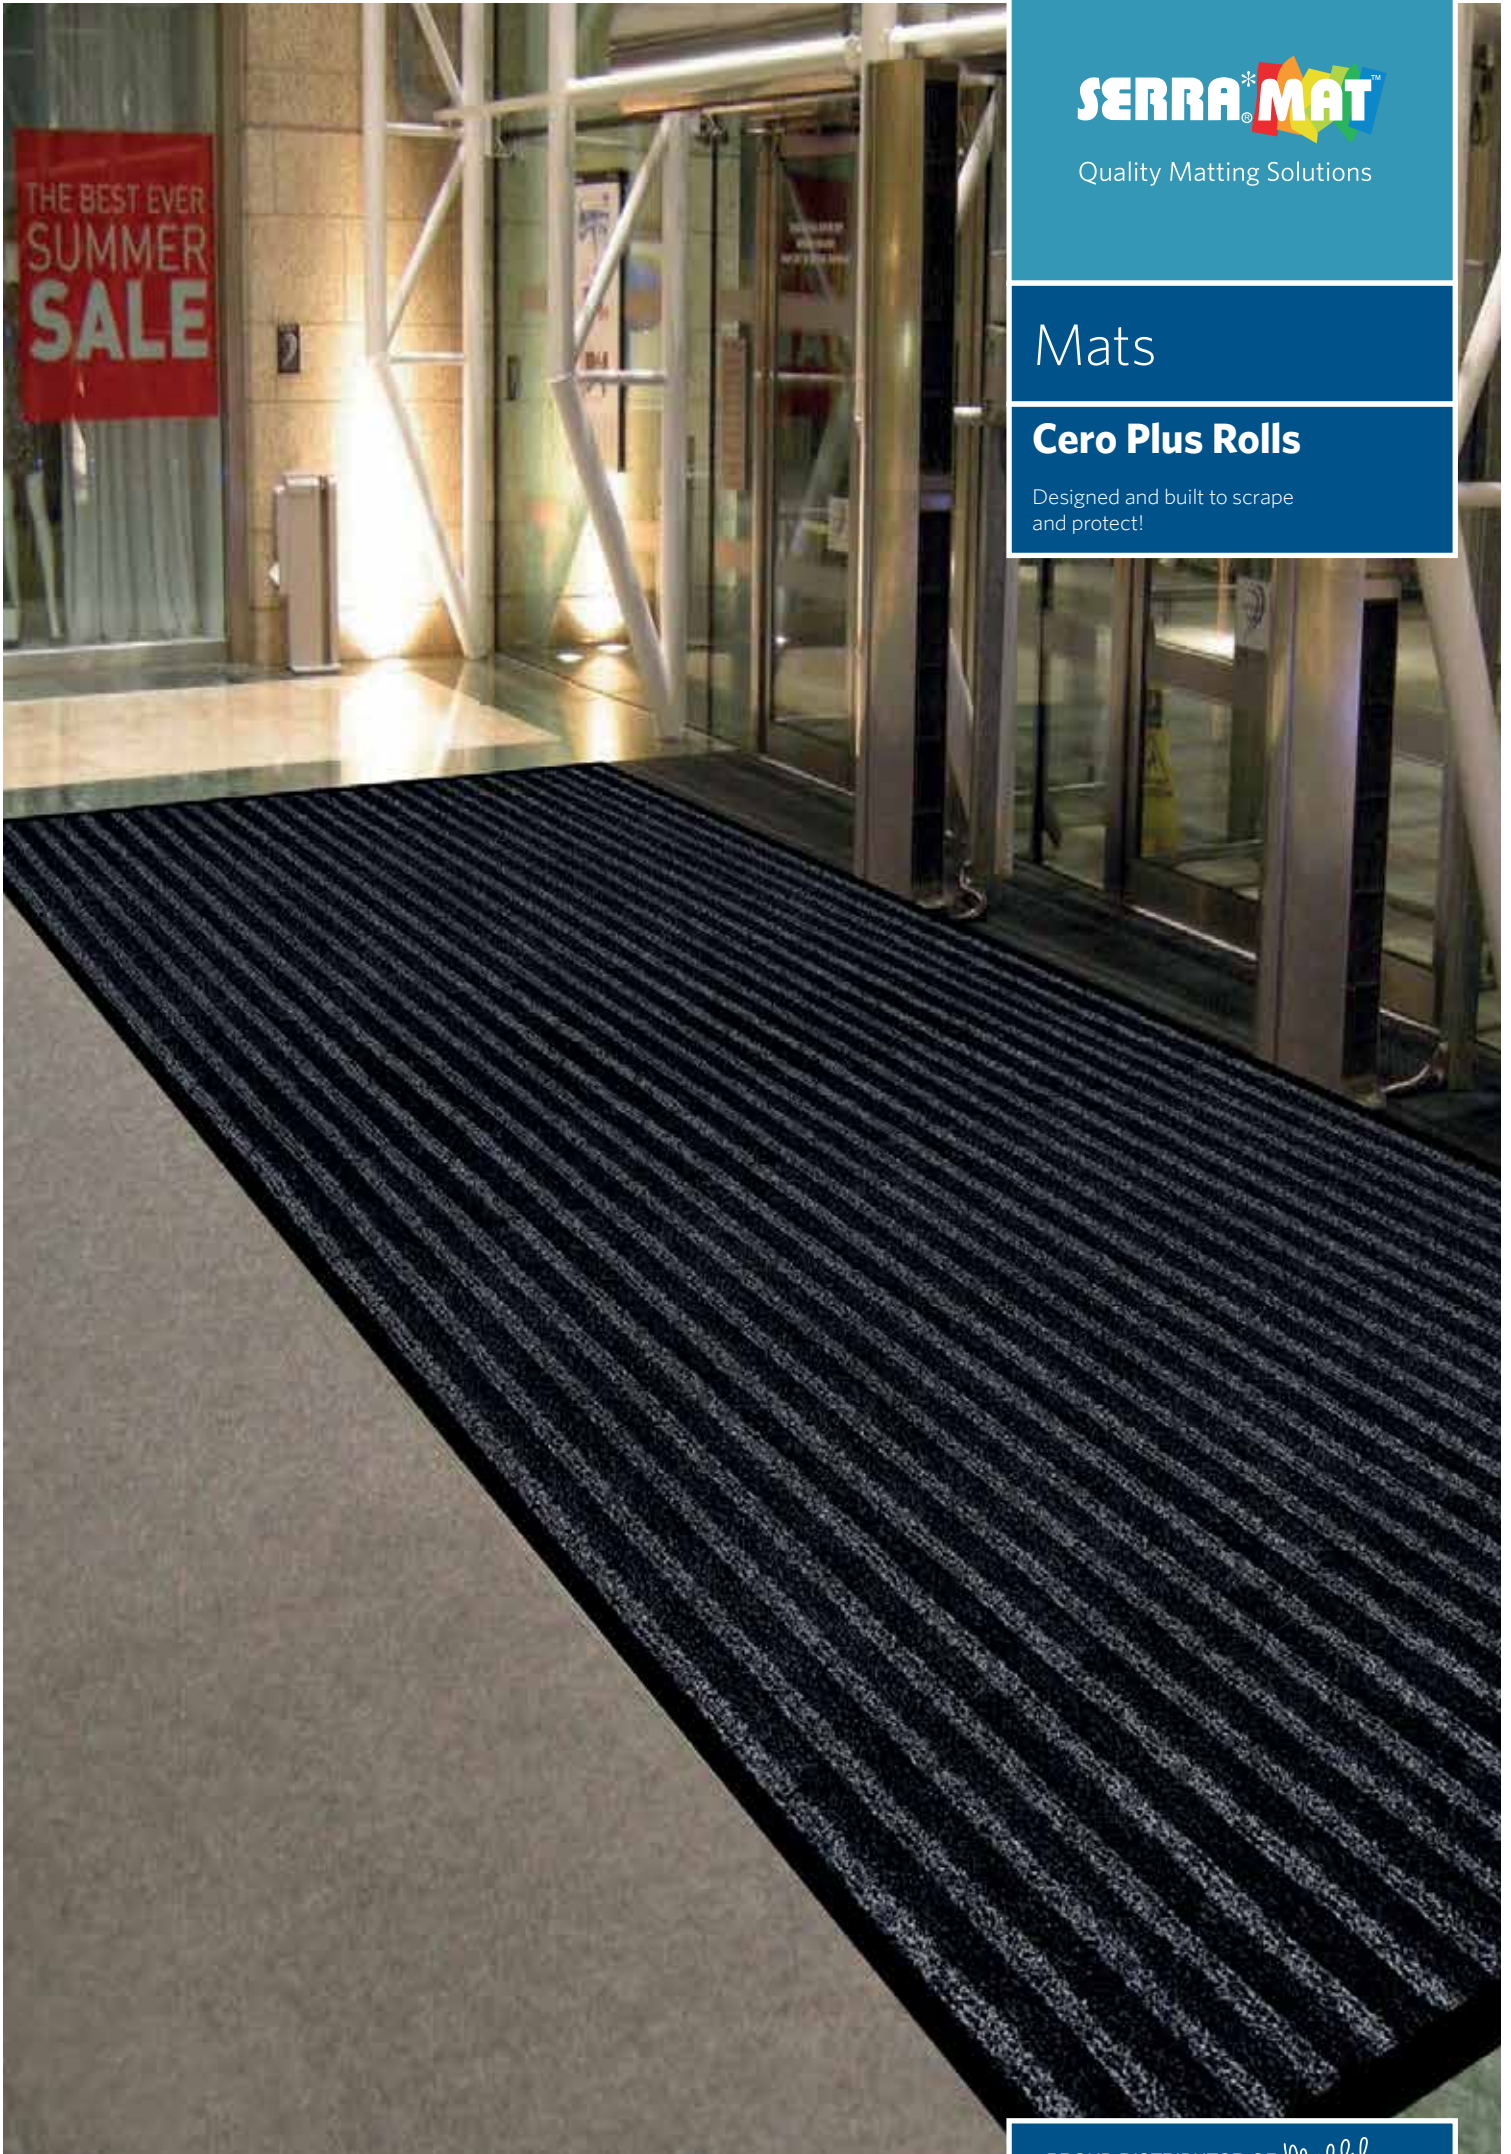

PROUD DISTRIBUTOR OF *Miliken*




Cero Plus rolls are manufactured on a PVC backing with borders on the long sides. Colour available: dark grey.

Rolls can be cut to the desired length to produce a tailor made mat or runner. This can be loose laid on the floor, or bonded to the subfloor using an acrylic tackifier adhesive.

### Cero Plus in a recessed mat well

Eco-flex® underlay can be used to compensate mat well depth when fitting Cero Plus in a mat well. Cero Plus can be cut to fit mat well size.

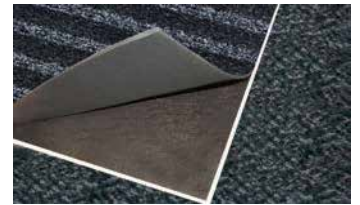

## Technical Specifications: Cero Plus Rolls

Product Construction	Solution dyed high-twist and heat-set multi-filament nylon tufted in alternate rows with mono-filament nylon - 100% PVC backing
Size in cm (ca.)	200x2500
Fabric weight (ca.)	860 gms/m <sup>2</sup>
Total weight	3360 gms/m <sup>2</sup>
Pile height	9,5 mm
Electrical behaviour	EN ISO 14041 test - Antistatic
UV resistance	ISO 105-B02 test, rated 8 (max.mark)
Fire resistance classification	EN ISO 13501 test - C <sub>fl</sub> - s1

All specifications are according to ISO 9001 Quality certification and ISO 14001 Environmental certification, and are subject to change to meet the ongoing improvements and innovation of our products.

**Serra®MAT™** - A division of SERRA SERVICES (Pty) Ltd

Email : [info@serra.co.za](mailto:info@serra.co.za)

Tel : +27 (0)11 334-7447

Fax : +27 (0)11 334-7165 or +27 (0)11 334-9858

Web : [www.serra.co.za](http://www.serra.co.za) & [www.serramat.co.za](http://www.serramat.co.za)

Postal: PO Box 1217 Southdale, South Africa, 2135



[www.serramat.co.za](http://www.serramat.co.za)