




Quality Matting Solutions

Mats

Obex® Via

Textile matting rolls and mats for use in entrances and circulation areas

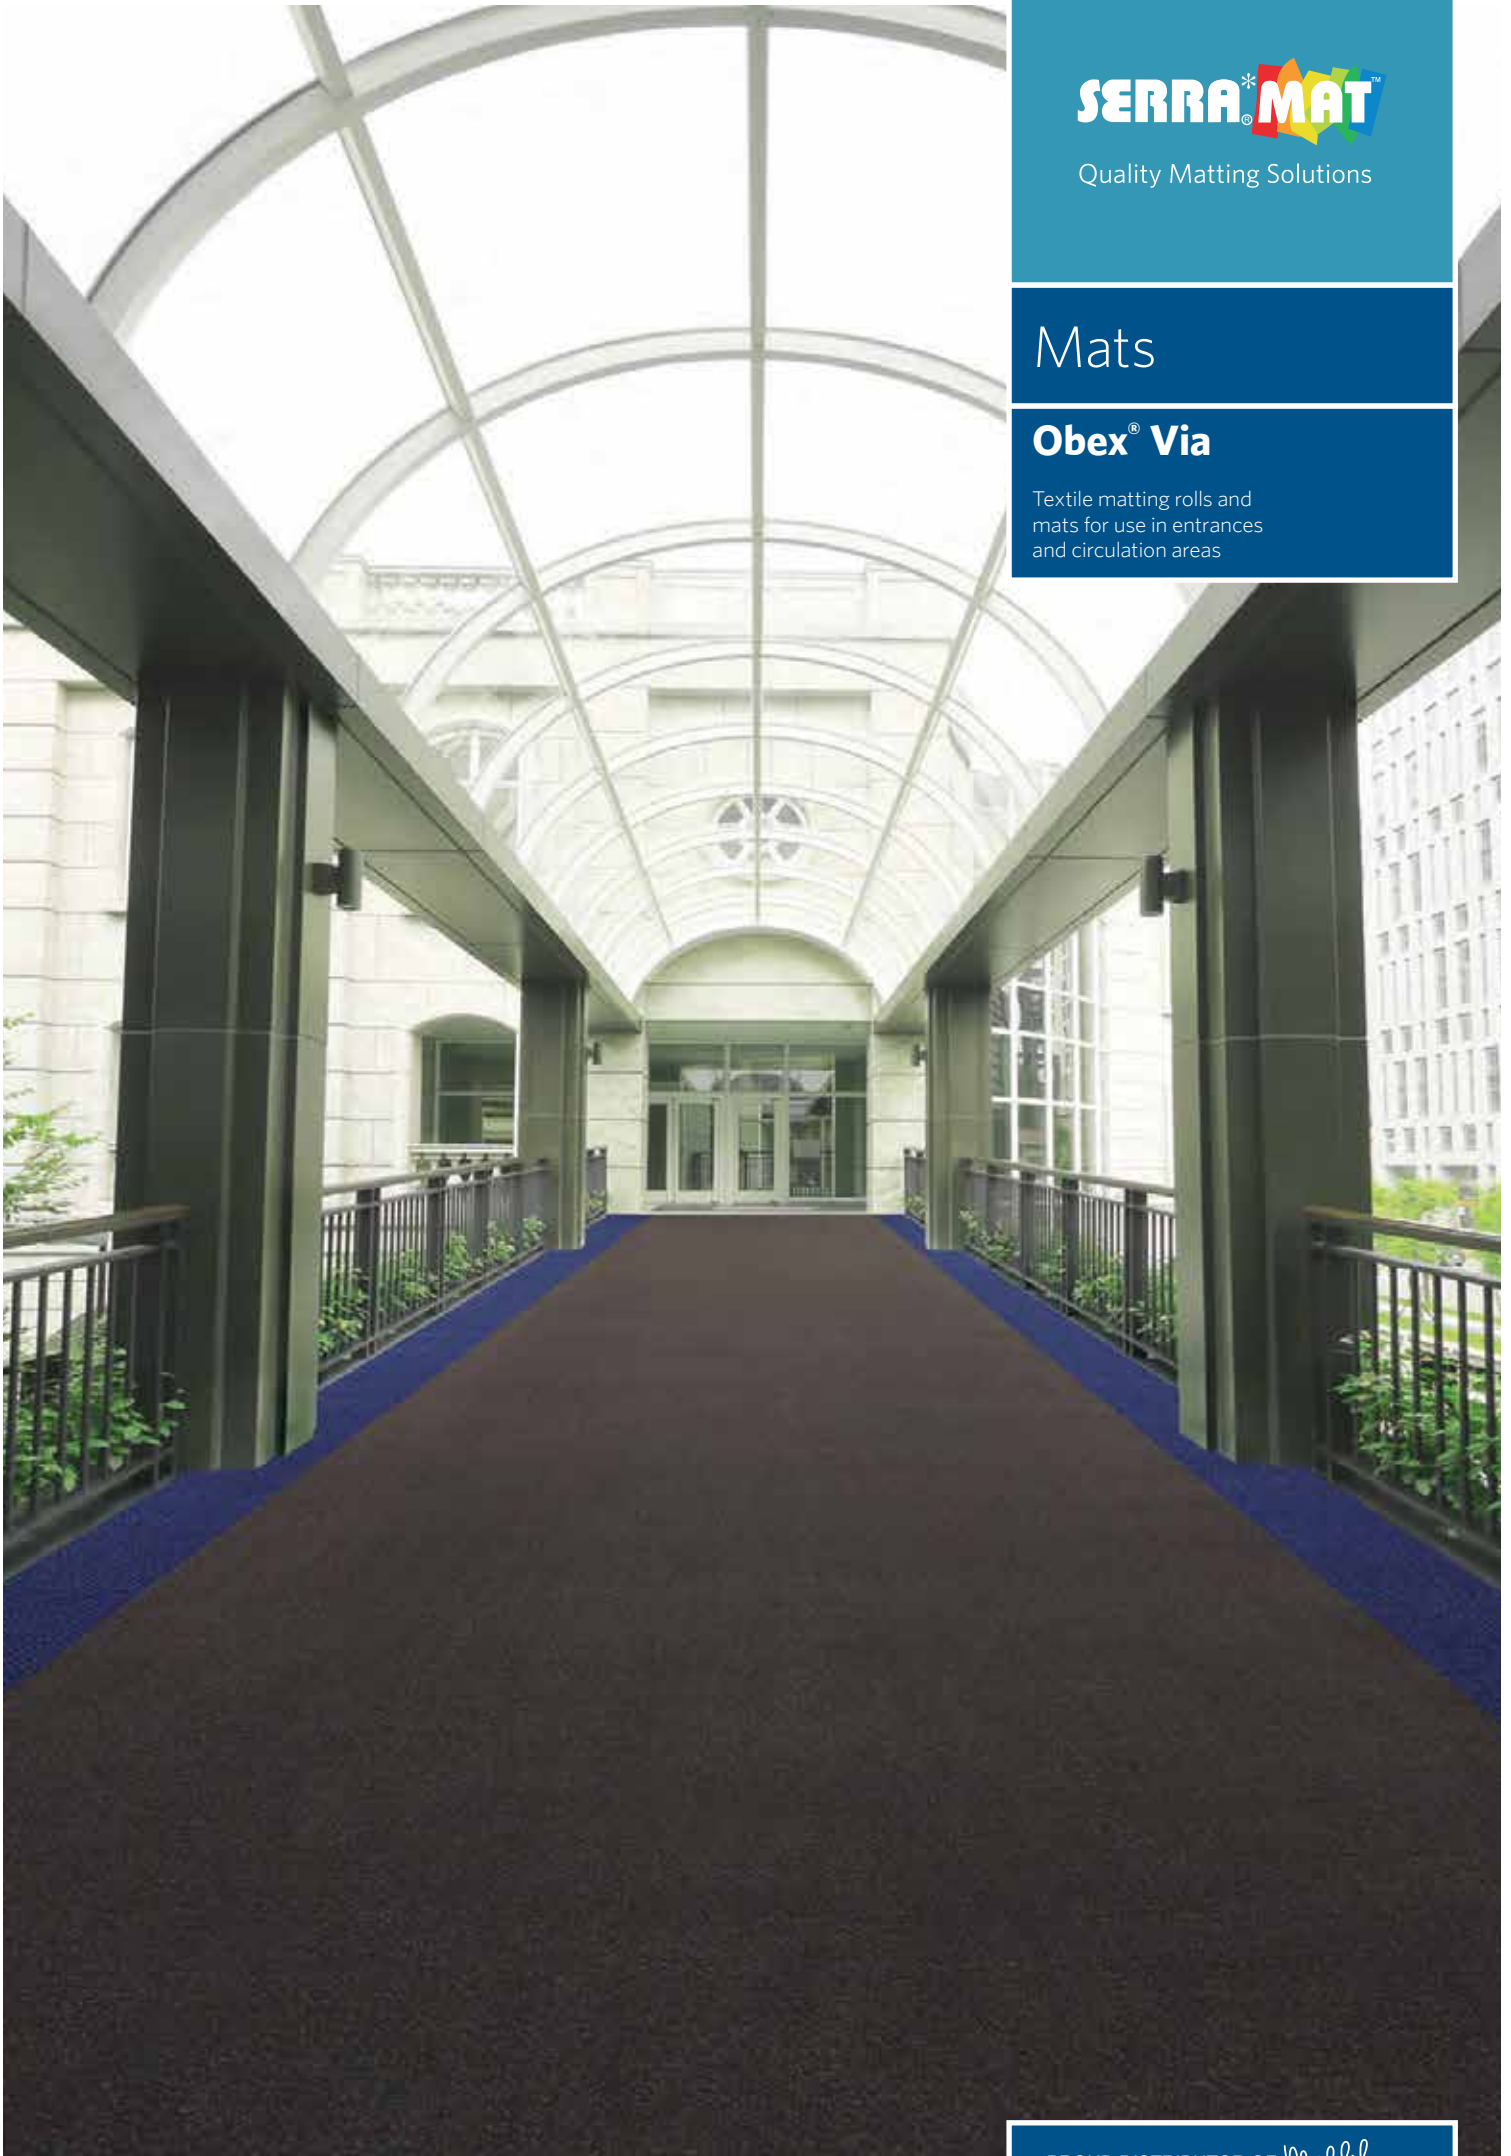

PROUD DISTRIBUTOR OF *Miliken*

Efficient matting not only provides cleanliness, it also helps securing floors whilst reducing cleaning costs.

CLEANLINESS

Up to 90% of the soil entering a facility is "walked in" through the front door, which can result in several kilos of dirt brought in per day (Rain can double or even treble this amount).



COST SAVING

Efficient matting can save up to 65% of cleaning costs dedicated to floors.



BRAND

You don't get a second chance to make a 1st impression!





HEALTH AND SAFETY

Effective matting helps keep floors dry and safe.



The 3 Zone Entrance Matting Concept

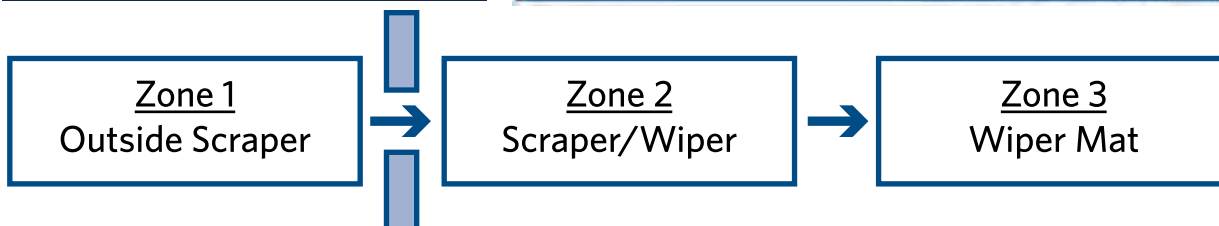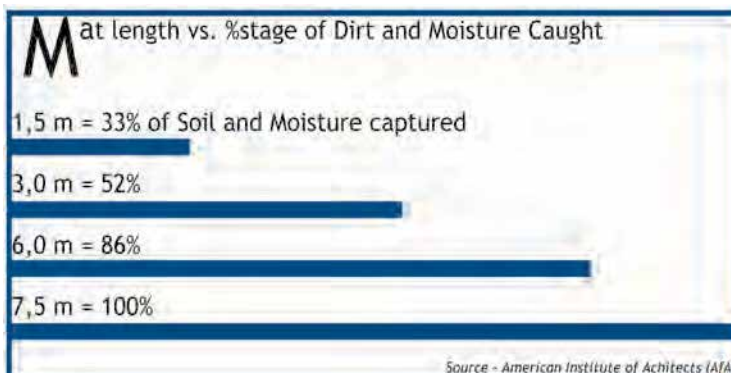

A minimum of 7.5 meters of matting is recommended to stop 100% of the soil and moisture entering a building by foot and wheel traffic.



The Via product line has been specially designed with a highly functional textile construction to absorb moisture and also scrape dirt through the combination of BCF polyamide fibers.


The offering comes in rolls or mats with a phthalate free backing. Rolls can be cut and fitted in entrances or circulation areas.

Special size mats can be made from these rolls and standard size mats are also available to protect any specific location in the building.


The wear resistance is classified as 33 which makes the product suitable for high traffic areas and heavy commercial use.



7201 - Carbon Black



7202 - Graphite Grey



7203 - Slate Grey




7208 - Ruby Red




7207 - Chocolate Brown




7206 - Coffee Brown




7204 - Navy Blue



7205 - Midnight Blue





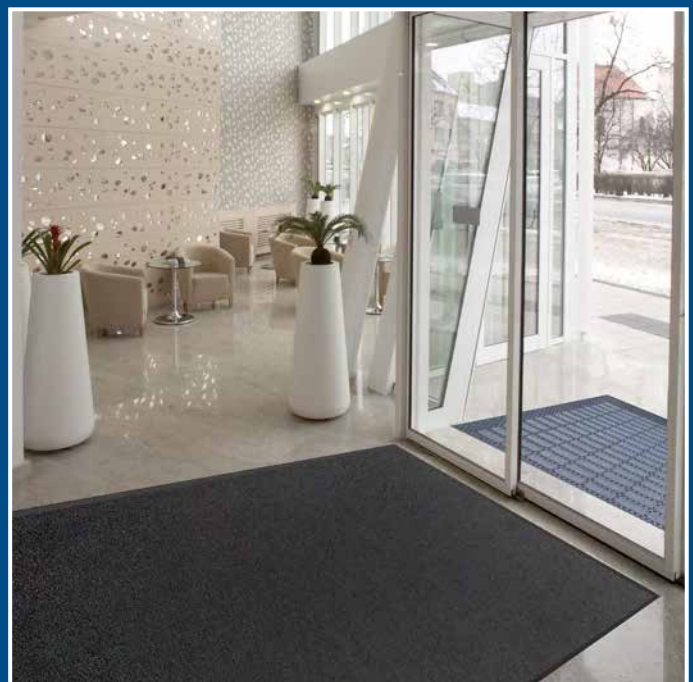









Edging for special size mat



Outdoors : features Tergo with Prior border

Indoors : features dark grey mat with 4 pvc borders

Technical Specifications: Obex[®] Via

Product Application	Heavy commercial use. Suitable for high traffic areas up to 4000 people per day		
Product Construction			
	Yarn type	100% polyamide - BCF	
	Yarn construction	Dual fibres - multifilament with monofilament	
	Manufacturing method	Tufted cut pile on non-woven polyester primary backing	
	Pile thickness	7.0mm	
	Fabric weight	approx. 1000g/m ²	
	Backing type (thickness)	Phthalate free PVC (2mm)	
ISO 1765	Total thickness	approx. 9mm	
ISO 8543	Total weight	approx. 3560g/m ²	
	Roll sizes in cm - with 2.5 cm edge each side	135x2500 / 200x2500	
	Mat sizes in cm - with 2.5 cm borders	60x90 / 90x150 / 135x200 / 200x200	
Product Performance Testing			
EN 1307	Wear resistance	33- commercial heavy	
EN 985	Castor chair	Continuous use, r = 3.3	
EN ISO 105/X12	Fastness to rubbing	4.5	
EN ISO 105/B02	Light fastness	>6	
EN ISO 105/E01	Water fastness	5	
EN ISO 105/E02	Seawater fastness	5	
BS 1006	Shampoo fastness	5	
EN ISO 105/X05	Fastness to organic solvents	4	
ISO 10965	Antistatic properties	approx. 10 ¹⁰ ohms	
ISO 8543	Pile density	0.101g/cm ³	
EN 1307	Comfort class	LC3	
EN 13893	Slip resistance	0.54 (DS)	
ISO 6356	Personal charging	<2kV	
ISO 8302	Heat transmission resistance	0.12m ² K/W	
BS EN 1963	Stair suitability	Intensive use	
EN 13501-1	Fire resistance classification	Cfl - s1	
Product Guarantee	1 year guarantee against manufacturing defects 5 year wear guarantee according to manufacturers' recommendations re. installation and maintenance		
CE Marking	All Obex [®] products meet the demands set by EN 14041		
DDA	All Obex [®] products confirm with the UK Disability Discrimination Act 1995		
REACH 1907/2006/CE	This product is in conformance with REACH European regulation		

All specifications are according to ISO 9001 Quality certification and ISO 14001 Environmental certification, and are subject to change to meet the ongoing improvements and innovation of our products.

Serra[®]MAT[™] – A division of SERRA SERVICES (Pty) Ltd
 Email : info@serra.co.za
 Tel : +27 (0)11 334-7447
 Fax : +27 (0)11 334-7165 or +27 (0)11 334-9858
 Web : www.serra.co.za & www.serramat.co.za
 Postal: PO Box 1217 Southdale, South Africa, 2135

