



Quality Matting Solutions

## Mats

### Scrapers

Keep dirt and moisture  
where they belong:  
Outside!

PROUD DISTRIBUTOR OF *Miliken*





## Heavy Duty Scraper™

Manufactured specifically for heavy duty and outdoor applications, the Heavy Duty Scraper™ mat acts as a tough first line of defence in all weather conditions. Its hard wearing construction – made of strong solution dyed mono filament yarns – removes excessive dirt and moisture, such as heavy deposits of mud, snow, sand and grit. This unique textile provides a stiff scraping action to capture the heavy dirt particles which the deep pile traps and conceals.

The Solution Dyed Nylon fibres are UV resistant, meaning that they are extremely colourfast – even when regularly exposed to strong sunlight. Rigorous tests simulating the worst possible weather conditions have confirmed the extraordinary durability of this unique product.

## Rubber Backing

The Heavy Duty Scraper™ mat is manufactured with our long-lasting nitrile rubber backing based on our most recent innovation in rubber formulation.

It is available with Gripper® (recommended for use on carpeted floors) or flat back. Customer labelling is available on borders and on the back of the mat.

## Rubber Backing Options

There is a 3 mm rubber thickness option (with or without borders) for specific installation requirements such as recessed floors or mat wells.

To order the correct mat size, you need to add 10cm to both width and length of the measured mat well - in order to allow for shrinkage during washing before fitting the mat on site.

Please contact our Customer Service at [matsinfoeurope@milliken.com](mailto:matsinfoeurope@milliken.com) or your local representative for further details.

## Colour: Grey



For areas with a high number of footfalls and wheeled traffic, such as food stores, shopping centres and airports, the Megahold™ backing option is recommended (please refer to the specific Megahold™ brochure for complete information).




## Prior™: modular tile matting system

Prior™ is a flexible multi-purpose flooring product. It can be installed as primary outdoor matting, fitted into matwells, or applied to a variety of industrial and commercial tasks.

The product structure incorporates resilient scrapers to remove particulate dirt. For outdoor applications, the open construction of Prior™ 16 is recommended for drainage.



Prior™ 11 mm Closed

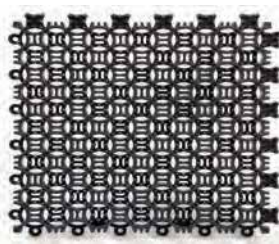

Prior™ 16 mm Open



Prior™ 16 mm Closed

## Installation of Prior™

A specific edging system is available for surface mounted installations.



Prior™ pre-assembled in 6 tile units




Quick to assemble with a hammer



Easy to cut with ruler and knife



Finished installation

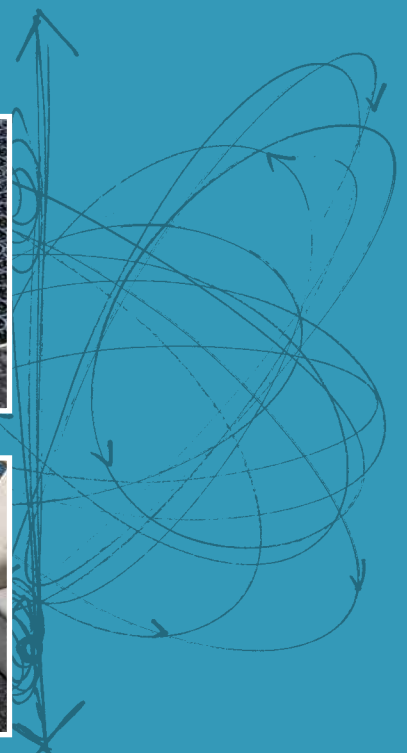

# Technical Specifications: Heavy Duty Scraper™

Product construction	Solution Dyed Monofilaments Polyamide 6.6 fibres in cut pile construction - with 100% nitrile rubber backing.
Sizes in cm (ca.)	Please refer to our price list
Fabric weight (ca.)	780 gms/m <sup>2</sup>
Total weight (+/-5%)	2720 gms/m <sup>2</sup>
Pile height	11 mm
Border thickness	2.1 mm
Electrical behaviour	Antistatic
Energy® backing	Allows optimum elimination of water during extraction process (reduces drying time)
Fire classification	ISO 13501 test, Class C <sub>fl</sub> -s1
Laundering	Please consult our Processing and Handling Guidelines
Warranty	Please refer to our written guarantee

# Technical Specifications: Prior™ modular tile system

Product Information	Prior™ 11C	Prior™ 16	Prior™ 16C
Tile material	UV resistant PVC		
Tile construction	Closed	Open	Closed
Total thickness in mm	11	16	16
Total weight in kg per m <sup>2</sup>	5.42	7.11	9.34
Safety	N/A	Friction test DS/EN ISO 8295 (2004) - class B	
Outdoor temperature resistance	From - 30°C up to + 50°C		
Ozone resistance	N/A	50 pphm ozone 30°C	
Wear resistance - Vetterman test	22,000 cycles	66,000 cycles	66,000 cycles
Fire resistance test	BS 4790		
Fire classification - FR version	N/A	Class C <sub>fl</sub> -s2	NA
Tile size in mm	Nominal 200x200 - Useable 195x195 when installed		
Tile colour	Graphite		

All specifications are according to ISO 9001 Quality certification and ISO 14001 Environmental certification, and are subject to change to meet the ongoing improvements and innovation of our products.

**Serra®MAT™** - A division of SERRA SERVICES (Pty) Ltd

Email : [info@serra.co.za](mailto:info@serra.co.za)

Tel : +27 (0)11 334-7447

Fax : +27 (0)11 334-7165 or +27 (0)11 334-9858

Web : [www.serra.co.za](http://www.serra.co.za) & [www.serramat.co.za](http://www.serramat.co.za)

Postal: PO Box 1217 Southdale, South Africa, 2135



[www.serramat.co.za](http://www.serramat.co.za)